

PTM7900


High Thermal Conductivity Phase Change Material

Honeywell's PTM7900 series, a super highly thermally conductive Phase Change Material (PCM) in both pad and paste formats, is designed to minimize thermal resistance at interfaces, maintain excellent performance through reliability testing, and provide scalable application at a competitive cost.

Based on a novel polymer PCM system, this material exhibits excellent interface wettability during typical operating temperature ranges, resulting in extremely low surface contact resistance.

A proprietary material provides superior reliability (pass 150°C baking 1000 hours, T/C-B 1000 cycles) and maintains low thermal impedance (<0.045°Ccm²/W @ no shim), making the PTM7900 series desirable for high performance integrated circuit devices.

PTM7900 Thermal Impedance (TI) vs. Pressure

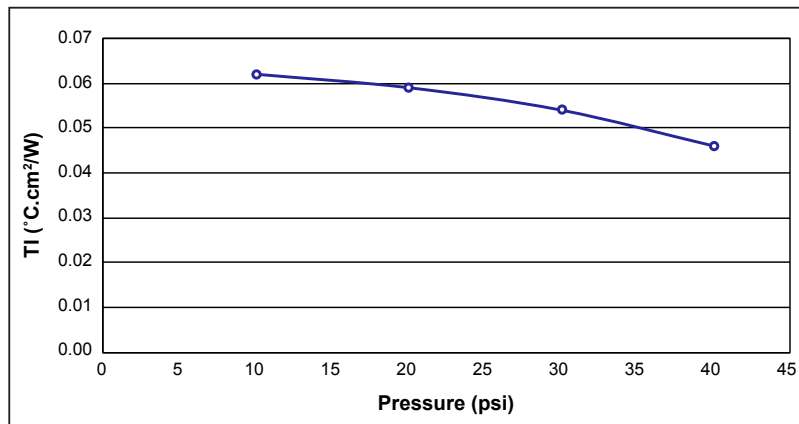

PTM7900 is ideal for high performance IT/Enterprise computing applications.

Honeywell TIMs Serve Multiple Applications



Automotive & Power



IT/Enterprise



Telecomm



Consumer Electronics



High-Brightness LED

FEATURES & BENEFITS

- High performance filler and polymer technology
- Highly conductive filler loading to optimize performance
- Superior handling and reworkability
- Superior reliable thermal performance
- Available in both pad and paste formats
- Phase change at 45°C

PTM7900 Technical Information


Physical Properties	Unit	Test Method	PTM7900	PTM7900-SP
Thermal Conductivity	W/m-K	ASTM D5470	8.0	8.0
Thermal Impedance @ no shim	*Ccm ² /W	ASTM D5470 Modified	0.045	0.045
Specific Gravity	g/cm ³	ASTM D374	2.8	2.5
Viscosity	Pa·s @ 2.1/s, 25 °C	RehometerHON	NA	177
Volume Resistivity	Ω·cm	ASTM D257-700	2.1x10 ¹⁴	2.1x10 ¹⁴
Thickness Range	mm		0.20-1.00	NA

STORAGE CONDITION

Refer to product label.

THERMAL IMPEDANCE POST RELIABILITY (ASTM E1461)

End of Line	0.045 °C-cm ² /W
Bake 150 °C, 1000 h	0.045 °C-cm ² /W
HAST, 96 h	0.045 °C-cm ² /W
Temperature Cycling "B" (-55 °C to +125 °C, 1000 cycles)	0.045 °C-cm ² /W

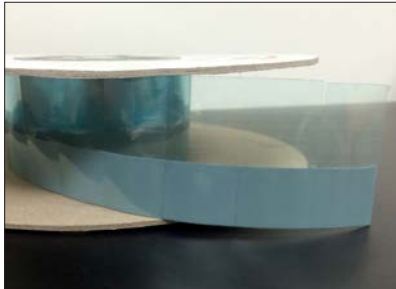

PTM7900 is available in both pad and paste/printable formats



Product Use

Clamping pressure and temperature are suggested to achieve a minimum bond line thickness of the thermal interface material, typically less than 1.5 mil (0.038mm) for best performance. The material must go through the phase change temperature to exhibit entitlement performance.

More Honeywell TIMs

PTM7900 is part of Honeywell's TIM Solutions family of phase change materials. Whatever the thermal challenge, we offer a TIM product that provides just the right characteristics for your application. Find out more about:

PTM7000 Series	PTM6000 Series
PTM5000 Series	PCM45F Series
HT Series	LTM Series

By visiting: electronicmaterials.com



Honeywell Electronic Materials

USA: 1-509-252-2102
 China: 86-21-28942481
 Germany: 49-5137-999-9199
 Japan: 81-3-6730-7092
 Korea: 82-2-3483-5076
 Singapore: 65-6580-3593
 Taiwan: 886-3-6580300 ext.312
www.electronicmaterials.com

Although all statements and information contained herein are believed to be accurate and reliable, they are presented without guarantee or warranty of any kind, express or implied. Information provided herein does not relieve the user from the responsibility of carrying out its own tests and experiments, and the user assumes all risks and liability for use of the information and results obtained. Statements or suggestions concerning the use of materials and processes are made without representation or warranty that any such use is free of patent infringement and are not recommendations to infringe any patent. The user should not assume that all toxicity data and safety measures are indicated herein or that other measures may not be required.

DS.0318Rev3
 ©2018 Honeywell International Inc.

Honeywell
 THE POWER OF CONNECTED