



HT5000 TI & DEFLECTION VS PRESSURE

November 8, 2020

HEM SH

Honeywell

HT5000 TI vs Different Pressure




TI Condition

ASTM D5470

Temperature: $50 \pm 1^\circ\text{C}$

Ramp: 10~50 Psi

Contact Area: 1.327 in.²

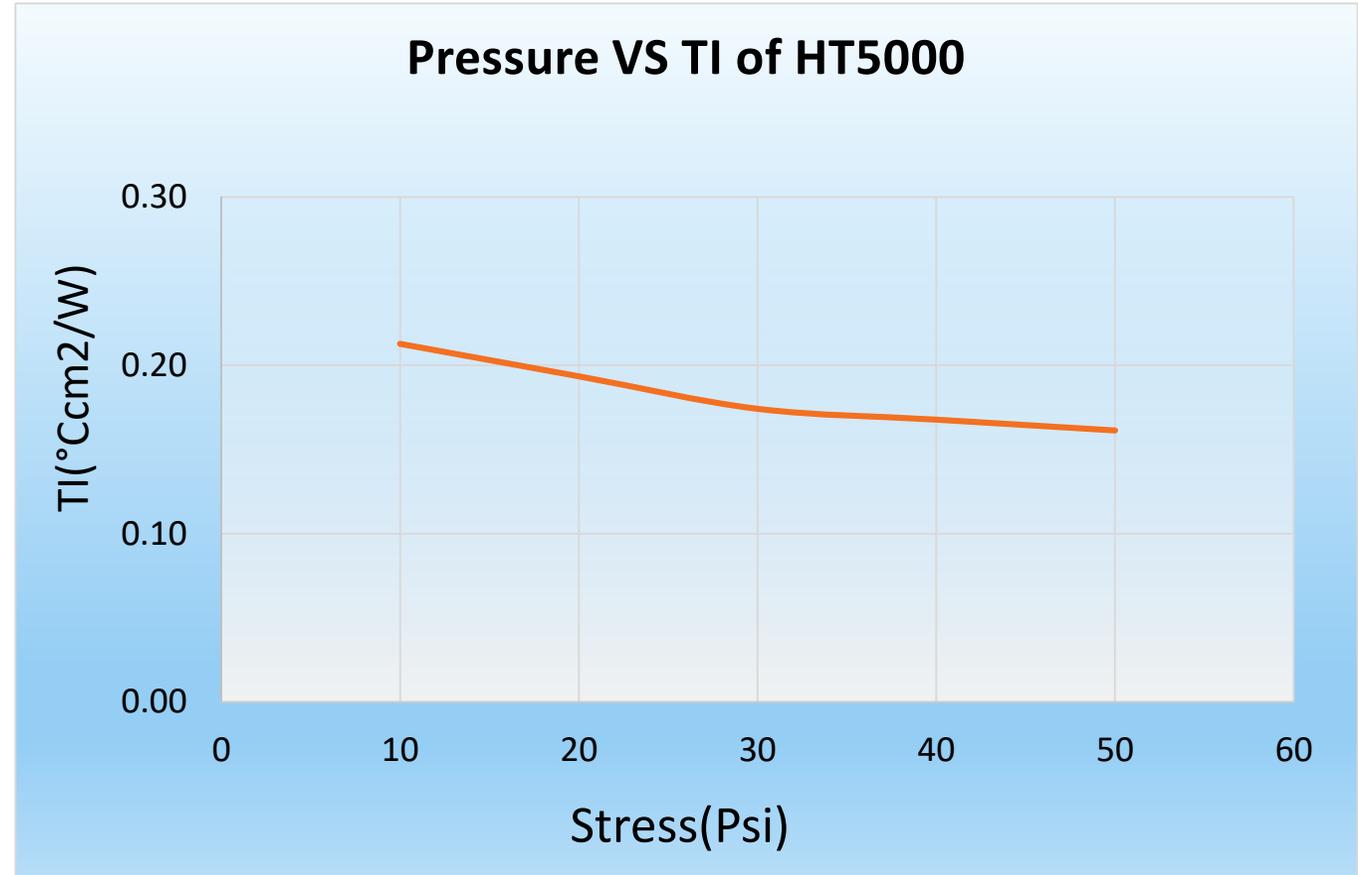

HT5000 Deflection vs Different Pressure




Deflection Condition

ASTM D575

Test speed: 0.6mm/min

Thickness: 1mm

Contact Area: 1in.²

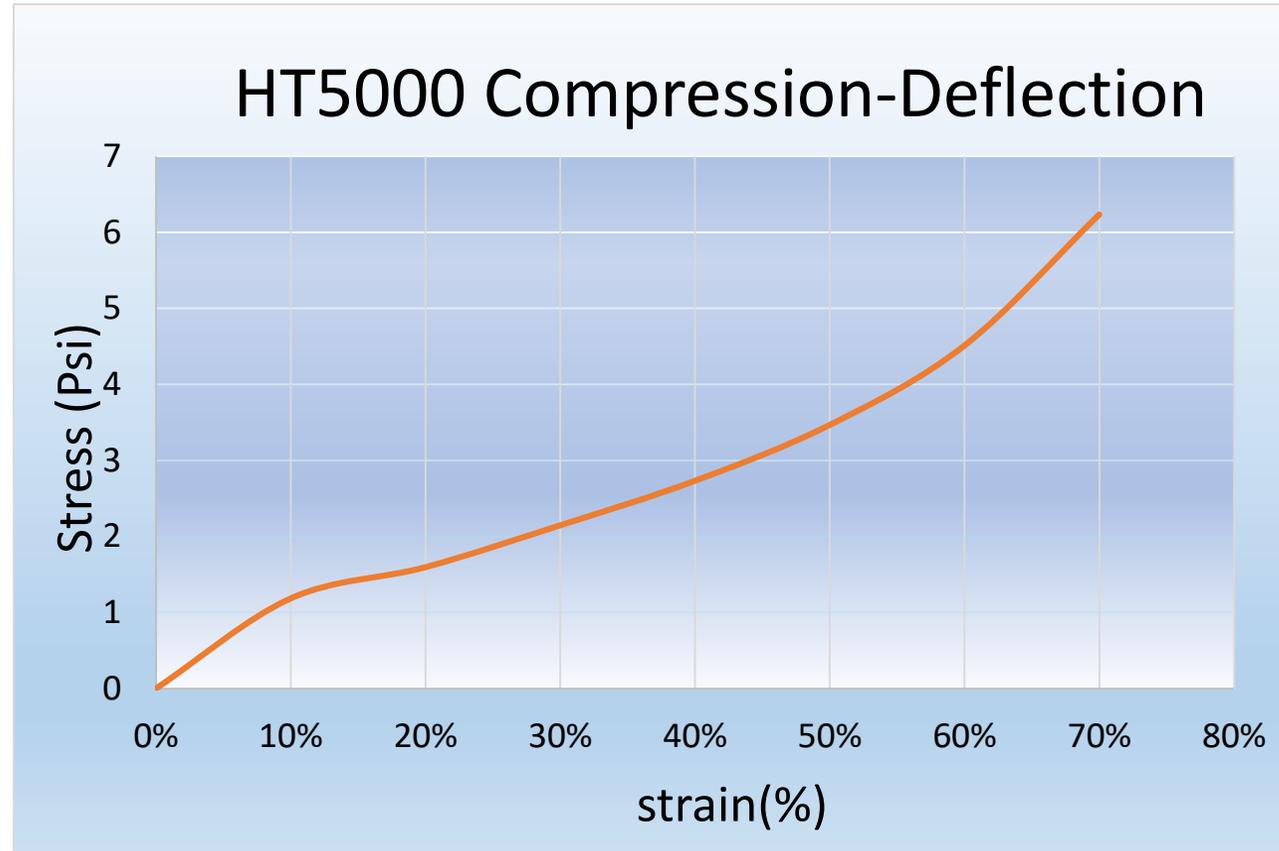

Honeywell is building a smarter, safer,
and more sustainable world

THAT'S THE POWER OF **CONNECTED**
THAT'S THE POWER OF **HONEYWELL**

Connected Aircraft • Connected Automobile • Connected Home • Connected Building
Connected Plant • Connected Supply Chain • Connected Worker

Honeywell

THE POWER OF **CONNECTED**