


LINQTAPE™ PIT2A-Series

2 mil polyimide film with acrylic adhesive

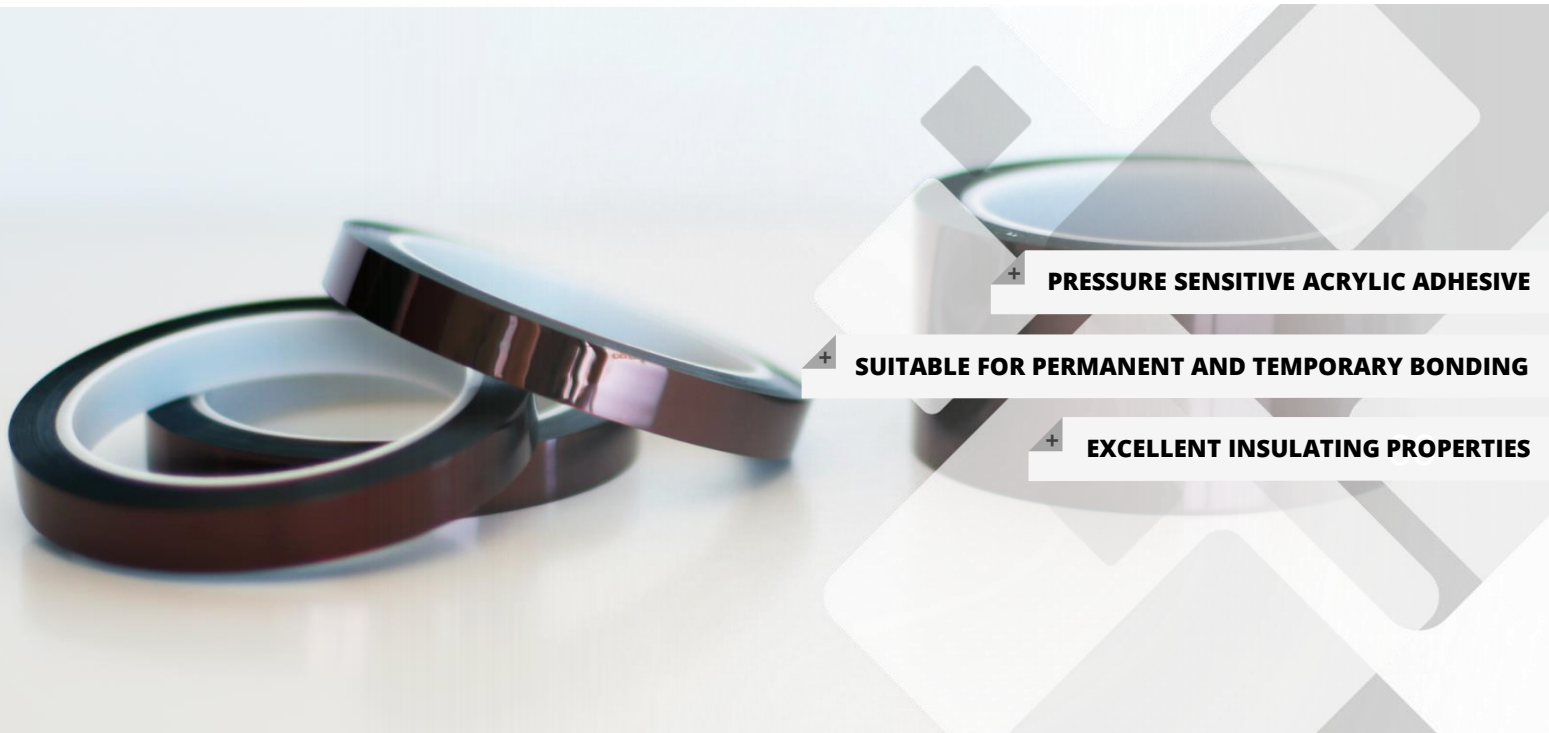

PRESSURE SENSITIVE ACRYLIC ADHESIVE

SUITABLE FOR PERMANENT AND TEMPORARY BONDING

EXCELLENT INSULATING PROPERTIES



PRODUCT DESCRIPTION

Insulating tape of 2 mil thick polyimide film backing with pressure sensitive acrylic adhesive.



PRODUCT APPLICATION

Used for high temperature electrical applications in semiconductor, smartcard, electronic, automotive and general manufacturing industries.



PRODUCT FEATURES

Suitable for permanent and temporary bonding. Excellent electrical and temperature insulating properties. Can be used in applications up to 155°C (311°F).



PRODUCT DESCRIPTION

LINQTAPE™ PIT2A-Series is a high-temperature resistant polyimide tape designed for both permanent and temporary bonding in many high temperature applications. These applications can be found in semiconductor, smartcard, electronic, automotive and general manufacturing industries.

LINQTAPE™ PIT2A-Series Tape provides an excellent balance of electrical, mechanical, thermal, and chemical properties over a wide range of temperatures. It can be used in applications that may see temperatures up to 155°C (311°F).

LINQTAPE™ PIT2A-Series Tape comes in 33 meter (36 yard) rolls of varying widths. LINQTAPE PIT-A polyimide films with acrylic adhesive are available in a range of thicknesses, starting from 1-mil (25.4µm) thickness and up. Custom thicknesses are available upon request.



PRODUCT APPLICATION



► Applications

- Temporary bonding of thermocouples for oven profiling
- Bonding of devices prior to solder reflow
- Splicing of Insulation layers
- Masking in high temperature powder applications
- Gold finger masking
- Insulating circuit boards and coils
- Wave solder masking tape
- Insulation wrapping of coils, transformers and capacitors.






PRODUCT FEATURES

TYPICAL PROPERTIES	UNIT	VALUE
Color		Amber
Adhesion Type		Acrylic
Film (Backing) Thickness		50,8 µm (2 mil)
Adhesive Thickness		38.1 µm (1.5 mil)
Total Thickness		88.9 µm (3.5 mil)
Adhesion to Steel	N/25mm oz/in	7.0 25.0
Tensile Strength	N/25mm lbs/in	222.5 50.0
Elongation	%	60
Dielectric Strength	Volts	>11000
Insulation Class		155 (F)
UL-94 Flammability Rating		
Polyimide Backing		V-0
Adhesive Layer		No
Temperature Resistance	°C °F	155 311

► PRODUCT CROSS-SECTION

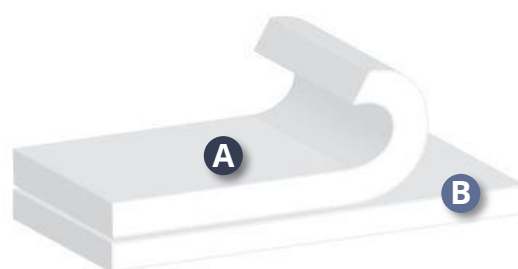

A Polyimide Film: 50.8 µm

B Acrylic Adhesive Layer: 38.1µm

► PRODUCT NOMENCLATURE

PIT: Polyimide Tape / Film

2: 2 mil Backing Thickness

A: Acrylic Adhesive

STORAGE AND HANDLING

LINQTAPE™ PIT2A-Series is supplied in rolls and should be kept in a cool (10°C – 25°C) dry place (40% – 75% humidity) away from direct sunlight or temperature extremes. Once removed from packaging it should be protected against dust and other impurities.

DATA RANGES

The data contained herein may be reported as a typical value and/or range values based on actual test data and are verified on a periodic basis.

The above figures are typical material properties only and are not to be used for product specification purposes. To generate a specification for this product, please contact our Quality Manager and request a copy of the current stock specification. The information and recommendations supplied in this document are believed to be accurate but no guarantee of their accuracy is made; they are for guidance only and should not be construed as a warranty. All implied warranties are expressly disclaimed, including without limitations any warranty of merchantability and fitness for use. It is recommended that purchasers before using this product conduct their own tests to determine whether the product is suitable for their particular purposes under their own operating conditions.



Europe & Asia

CAPLINQ Netherland
Provincialeweg 1,
1561KK Krommenie
The Netherlands
Tel : +31 (20) 893 2224

Americas

CAPLINQ Corporation
957 Snowshoe Crescent
Orléans, Ontario K1C 2Y3
Canada
Tel : +1 (613) 482.2215

Worldwide

www.caplinq.com
Email : info@caplinq.com